



Alteração de rede Wi-Fi. Uno-DM - ABB




1. O inversor libera um sinal de Wi-Fi (conforme imagem abaixo).

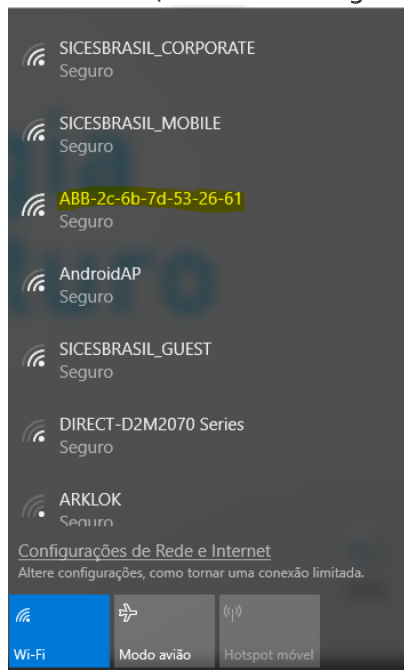

2. Conecte na rede abb a senha solicitada é o **PK = PRODUCT KEY** que está mencionando na etiqueta ao lado do inversor.
3. Conectado a rede da ABB, abra seu navegador e digite **192.168.117.1** e dê um Enter.
4. Após abrir a página geral de visualização e configuração.

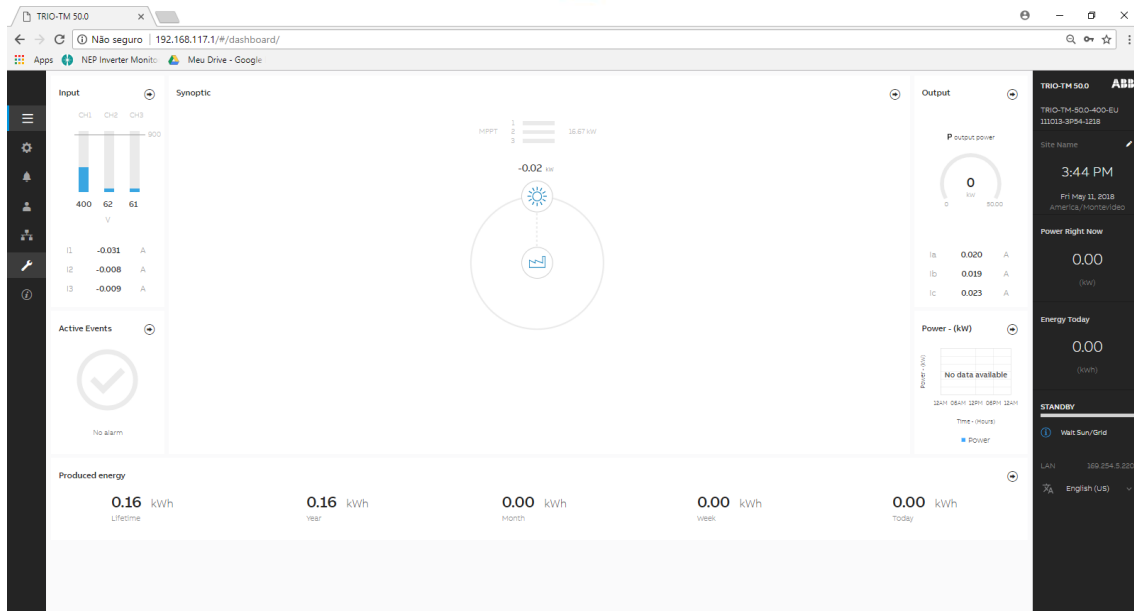

5. Clique no ícone de **Network**, em seguida **WLAN**.

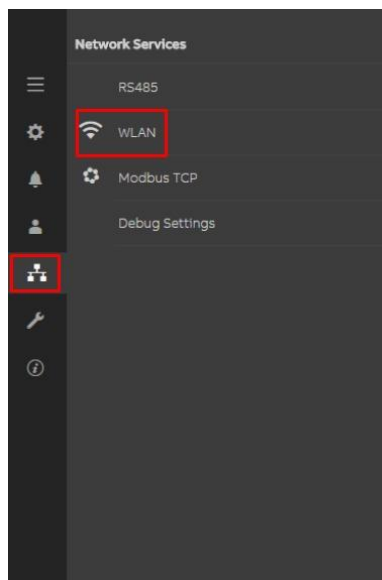

6. Após isso vai abrir a página de configuração de *Wireless Channel*, no qual você vá em *Edit channel 2 configuration*.
Selecione a rede desejada, digite a sua senha e clique em **Apply changes**.



WLAN Status

Wireless channel 1

You are connected through the channel 1 (Access Point)

Mode:	Access Point
Status:	on
SSID:	ABB-b0-72-bf-9f-e4-6a
IP:	192.168.117.1

Wireless channel 2

Mode:	Station
Status:	connected
Connected to:	Home_Network
Signal level:	Strong
IP:	10.21.43.201
Netmask:	255.255.252.0
DNS:	
Gateway:	it-r-valwificli

DISCONNECT

Edit channel 2 configuration

IP Settings

DHCP

Available Network (SSID)

Home_Network

Password

.....

Show password

Back

Apply changes

Pronto, seu processo de alteração de rede ou senha Wi-Fi foi aplicado com sucesso!